



High Quality Transformers


L76-56 KA チョーク コイル

部品 No.	測定条件 100Hz 5V	インダクタンス	磁束密度 50 Hz 100V	許容 DCA	直流抵抗	概略寸法	重量
L76-56 KA	直列 DC 80 mA 並列 DC 160 mA	直列 $L \approx 30$ H 並列 $L \approx 7.5$ H	直列 ≈ 0.95 K 並列 ≈ 1.9 K	直列 80 mA MAX 並列 160 mA MAX	(1-2) $\approx 200 \Omega$ (3-4) $\approx 200 \Omega$	A ケース入り 69 x 72 x 92 H	約 1820 g

* 定格内での御利用をお願い申し上げます。

- インダクタンス
(1-2)(3-4) 直列 100Hz 5V DC 80 mA $L \approx$
(1-2)(3-4) 並列 100Hz 5V DC 160 mA $L \approx$
- 直流抵抗
(1-2) _____
(3-4) _____


上面



下面




接続図

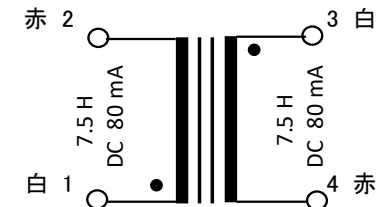

DC	0	0	10	20	30	40	50	60	70	80	90	100	mA
ωL	54.4	31.6	29.9	29.8	29.6	29.0	28.4	27.2	25.8	23.2	19.0	16.3	K Ω
L	86.6	50.3	47.6	47.4	47.1	46.1	45.2	43.3	41.0	36.9	30.2	25.9	H

DC	0	0	20	40	60	80	100	120	140	160	180	200	mA
ωL	14.8	13.4	8.66	8.64	8.52	8.32	8.08	7.71	7.07	6.49	5.74	4.76	K Ω
L	23.5	21.3	13.7	13.6	13.5	13.2	12.8	12.2	11.2	10.3	9.13	7.57	H

直列 (1-2-3-4) ≈ 30 H DC 80 mA
 並列 (1-2) $> \approx 7.5$ H DC 160 mA
 (3-4)

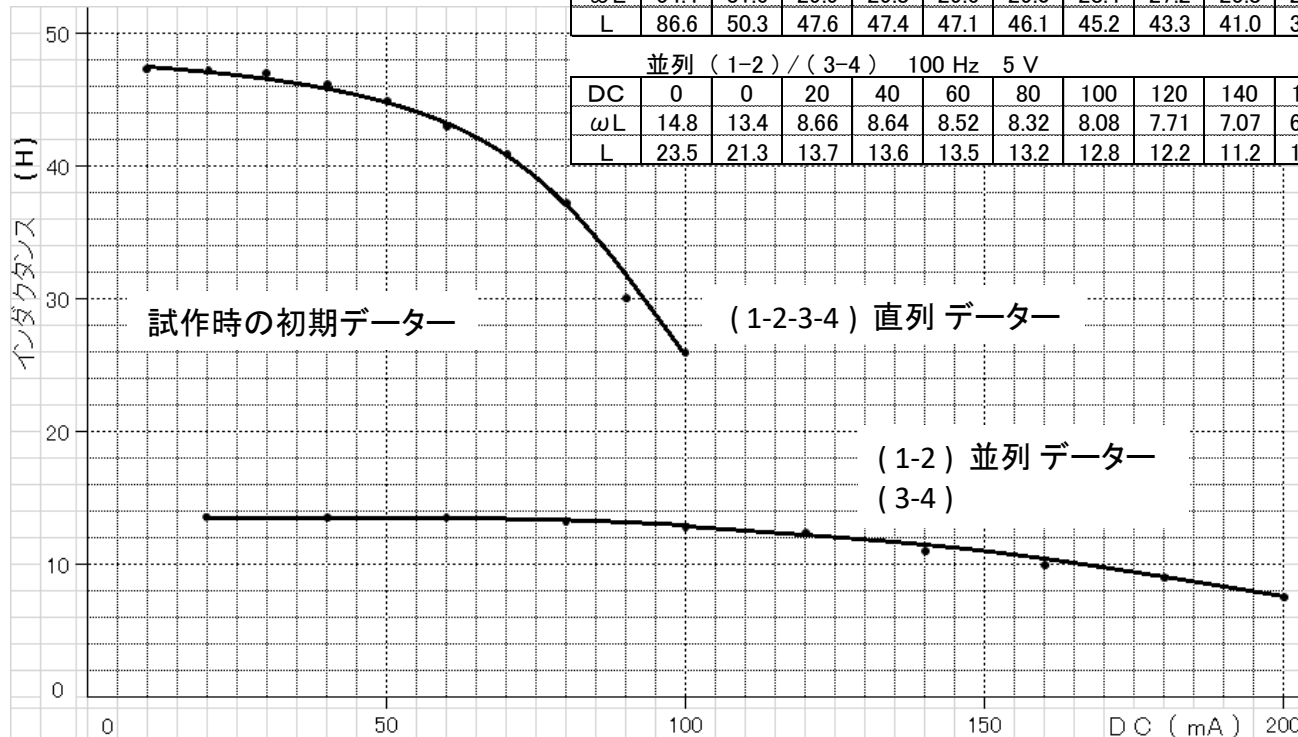

外形寸法図

UL 1015 #20 $\ell \approx 150$ mm

