

NOTE:

RATING:

VOLTAGE RATING : 30V AC (rms)

CURRENT RATING : 1 A MAX

ELECTRICAL CHARACTERISTICS:

CONTACT RESISTANCE: 30m ohms MAX

INSULATION RESISTANCE: 100M ohms/min

DIELECTRIC WITHSTANDING VOLTAGE:

500V DC AT 1 MINUTE


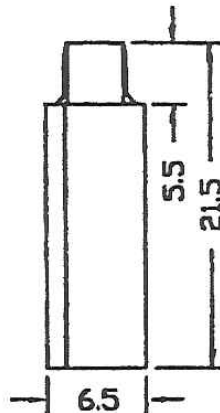
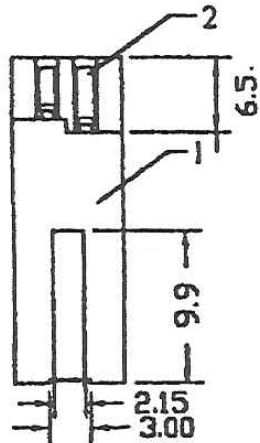
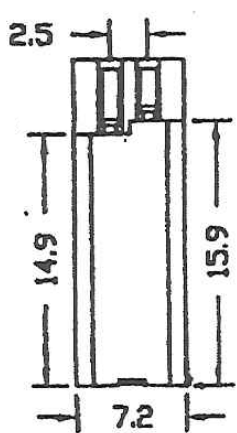


TABLE NPAKT NUMBERING CODE:

U B X X X X - X X X - X X

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Series No.  
UA/USB A TYPE  
UB/USB B TYPE

② P.C.B  
P1-DIP90°  
P2-DIP180°P3-SMT  
CABLE

C1-SOLDER C2-CRIMP PIN  
C3-ASSEMBLAG C4-MOLDED

③ 1: ONE LAYER  
2: TWO LAYER  
3: THREE LAYER

④ 1: RIGHT ANGLE  
2: FLCK

⑤ 1: NO BACK SHELL  
2: HAVE BACK SHELL

⑥ ①: NICKEL; TIN  
②: GOLD COVER

⑦ 1: 1u' 2: 3u' 3: 5u'  
4: 10u' 5: 15u' 6: 30u'

⑧ COLOR ⑨ NOX X  
1: BLACK  
2: WHITE 3: BEIGE ..

No.	PART NAME	DESCRIPTION	THICKNESS	QTY	SUPPLIER
1	HOUSING	PBT		1	B0002
2	CONTACT1	Phosphor Bronze	0.25mm	4	B0002
3	FRONT SHELL	STEEL	0.30mm	1	B0002
4	BACK SHELL	STEEL	0.30mm	1	B0002

TOLERANCE			DWG NO: UM002		TITLE: USB-B TYPE MALE SOLDER TYPE		
SELECT	1	2	3	PART NO: UBC1---XXX-02			
0.20	±0.02	±0.03	±0.04	CUSTOMER NAME:			
0.25	±0.03	±0.04	±0.05	CUSTOMER P/N:			
0.30	±0.04	±0.05	±0.06	UNIT			
0.40	±0.05	±0.06	±0.08	SCALE			
0.50	±0.06	±0.08	±0.10	REV.			
0.60	±0.08	±0.10	±0.12	MM			
0.80	±0.10	±0.12	±0.15	NONE			
1.00	±0.12	±0.15	±0.20	4			